




# Audiovox T752 Camera Replacement

A guide to replacing your device's camera.

Written By: Logan

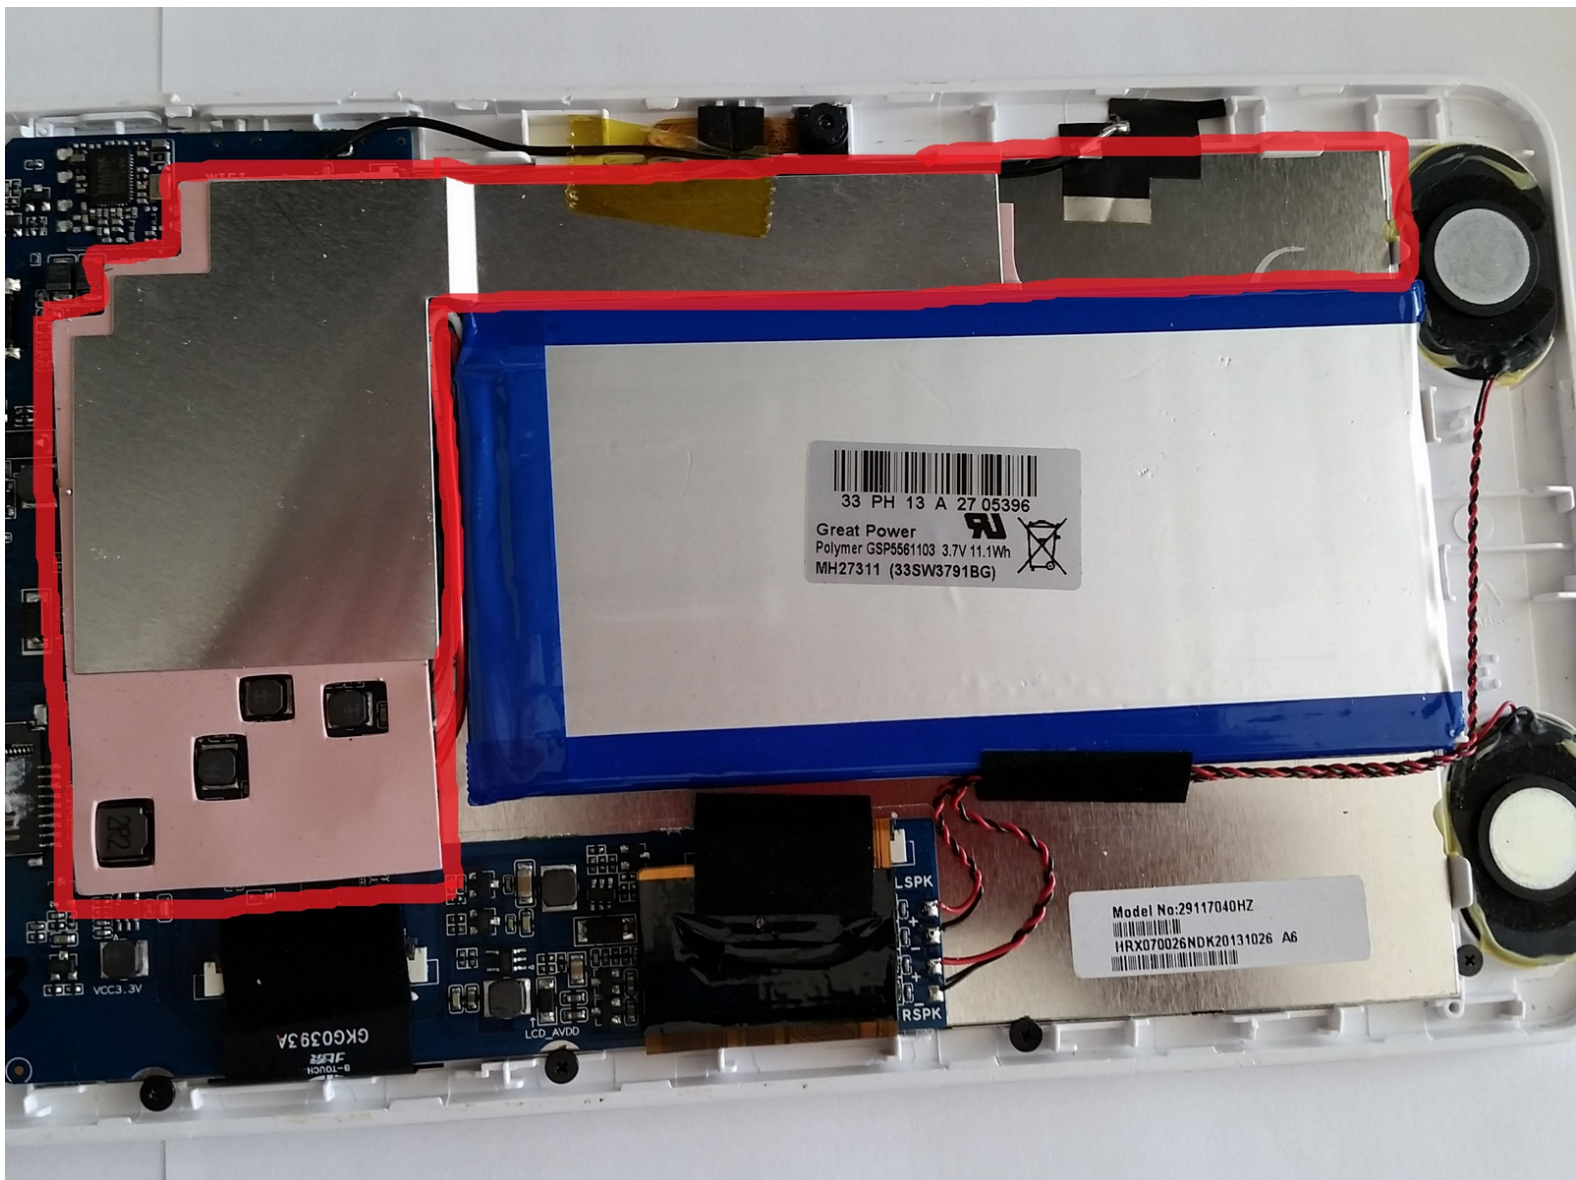

## INTRODUCTION

This is an in-depth guide on how to replace the camera in your Audiovox T752. The guide includes step-by-step instructions and pictures to help you through the process.



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)



### PARTS:


- [Audiovox T752 Camera](#) (1)

## Step 1 — Back Panel



- Find a good spot to fit the pry bar between the back cover and tablet. Slowly drag the pry bar along the sides of the cover.
- **NOTE:** some force will need to be used to remove the cover. Avoid excessive force.


## Step 2 — Camera

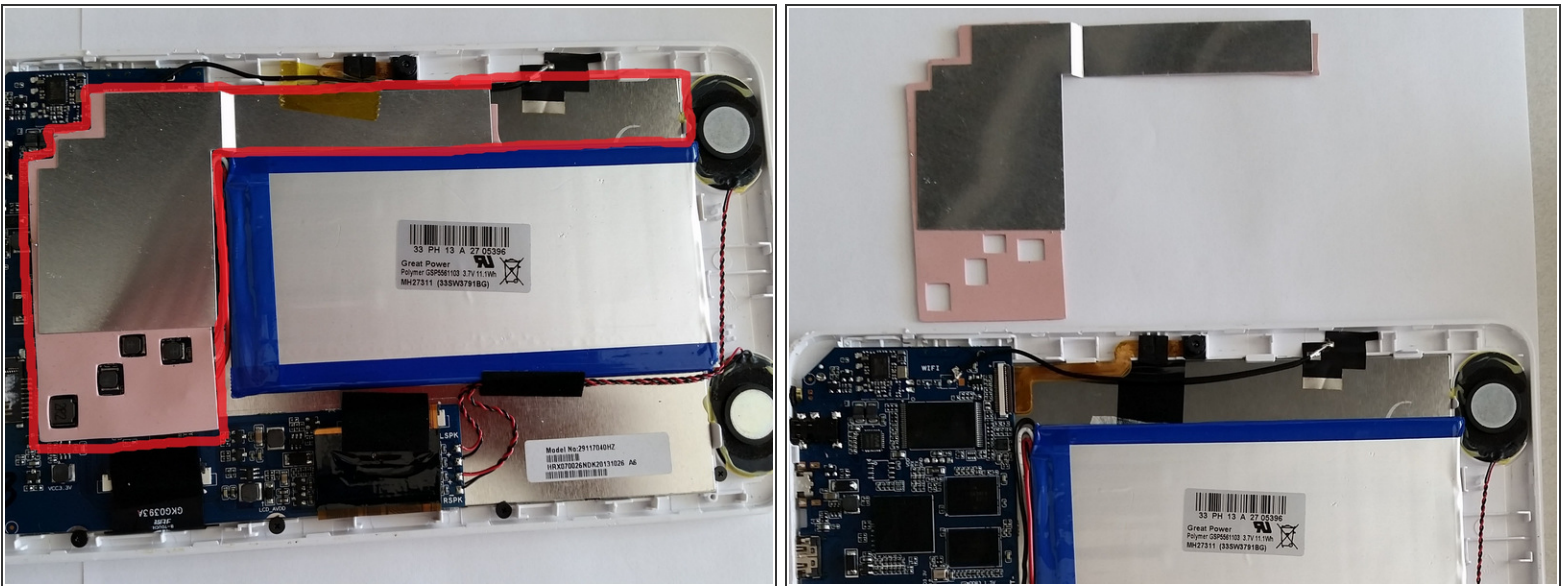

- Remove the pink and aluminum protective cover. Be sure to also remove any tape holding it in place.



## Step 3

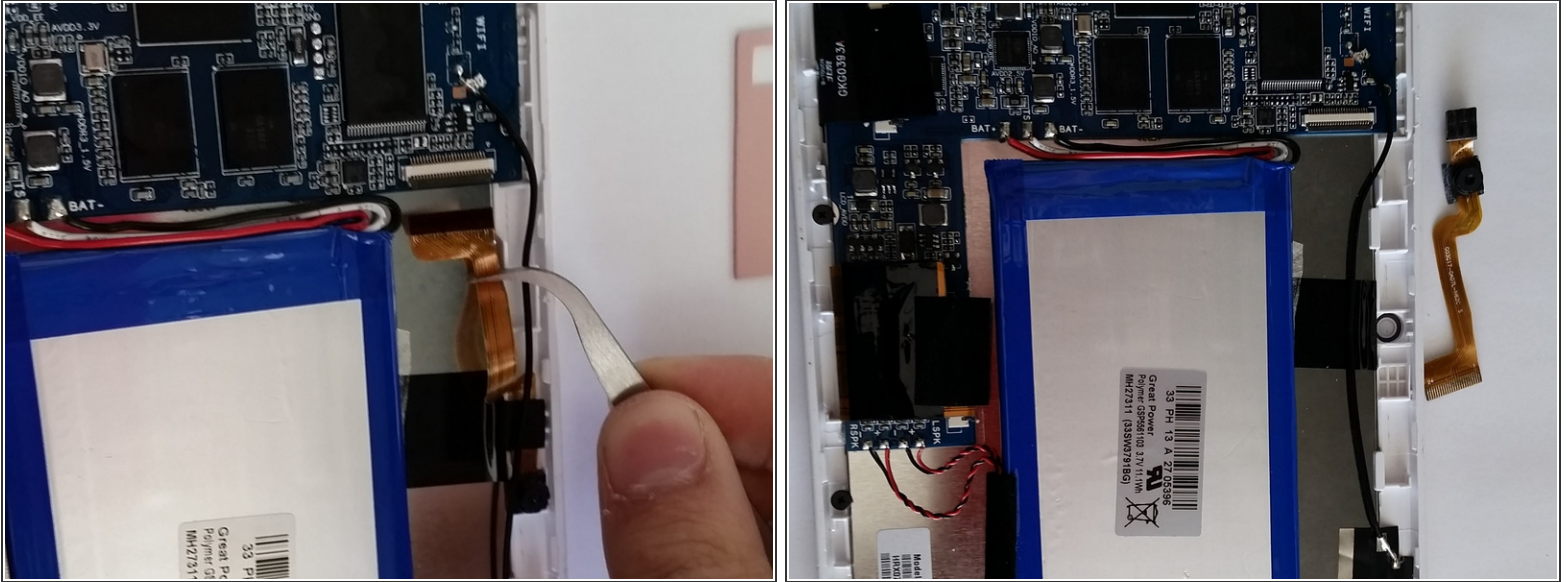

- Remove the orange camera strip from the motherboard.

## Step 4



- Insert new camera strip and place the pink and aluminum protective cover back in the device.
- **NOTE:** camera strip may be loose when reconnected. Use of electrical tape may be required.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 04:51:12 PM.